


GS BATTERY VRLA BATTERY SPECIFICATION

Taiwan

電池型式 (BATTERY TYPE) : PE12V18

Dimensions : mm

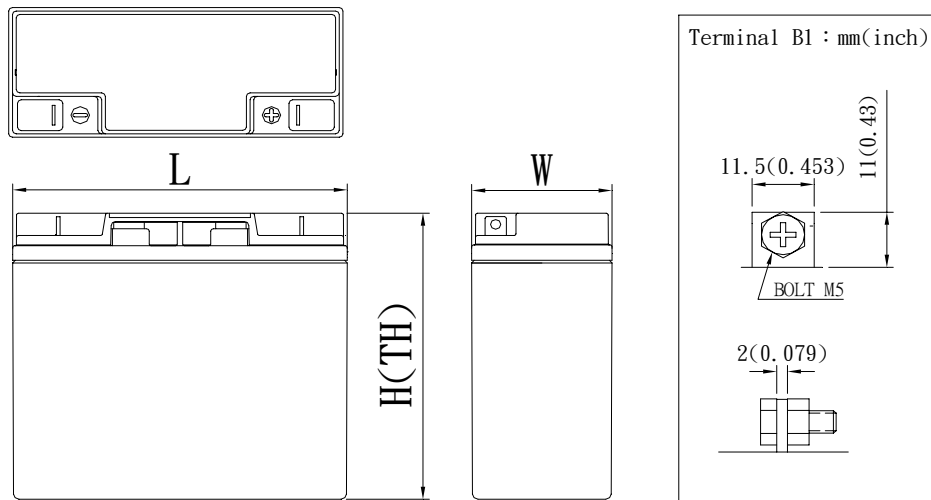

1.尺寸(Dimensions):

項目 (Item)	規格值 (Specifications)
1.長 (Length)	181±1 mm
2.寬 (Width)	76±1 mm
3.高 (Height)	167±1 mm
4.總高 (Total Height)	167±1 mm

2.性能測試(Performance):

項目 (Item)	規格值 (Specifications)				
1.電壓 (Nominal Voltage)	12 V				
2.重量 (APPROX. Weight)	6.00Kgs				
3.自行放電特性 Shelf Life (25°C)	1月 (1 Month)	97% ↑			
	3月 (3 Month)	90% ↑			
	6月 (6 Month)	80% ↑			
4.放電容量 ±5% (Discharge Capacity)	Discharge current	Final voltage	Discharge time	Capacity	
	20HR容量 (20hr Capacity)	0.90A	10.50 V	20hrs	18.00AH
	5HR容量 (5hr Capacity)	3.06A	10.20 V	5hrs	15.30AH
	3HR容量 (3hr Capacity)	4.20A	10.20 V	3hrs	12.60AH
	1HR容量 (1hr Capacity)	10.80A	9.60 V	1hrs	10.80AH

※電池經充、放電三次，容量達規格值95%。

(Battery capacity can reach 95% of Specification value after three cycles of charging and discharging.)

3. 定功率放電特性(Constant Power Discharge Characteris

※實測之一例，非保證值


※One example of our result, not announcement value.

Time F.V	5Min.	7.5Min.	10Min.	15Min.	20Min.	30Min.	60Min.
9.6 V	890 W	698 W	588 W	461 W	330 W	287 W	170 W
10.2 V	755 W	622 W	532 W	418 W	324 W	279 W	177 W
10.8 V	620 W	559 W	468 W	387 W	305 W	265 W	165 W

※實測之一例，非保證值

※One example of our result, not announcement value.

4. 性能特性圖(Characteristics)

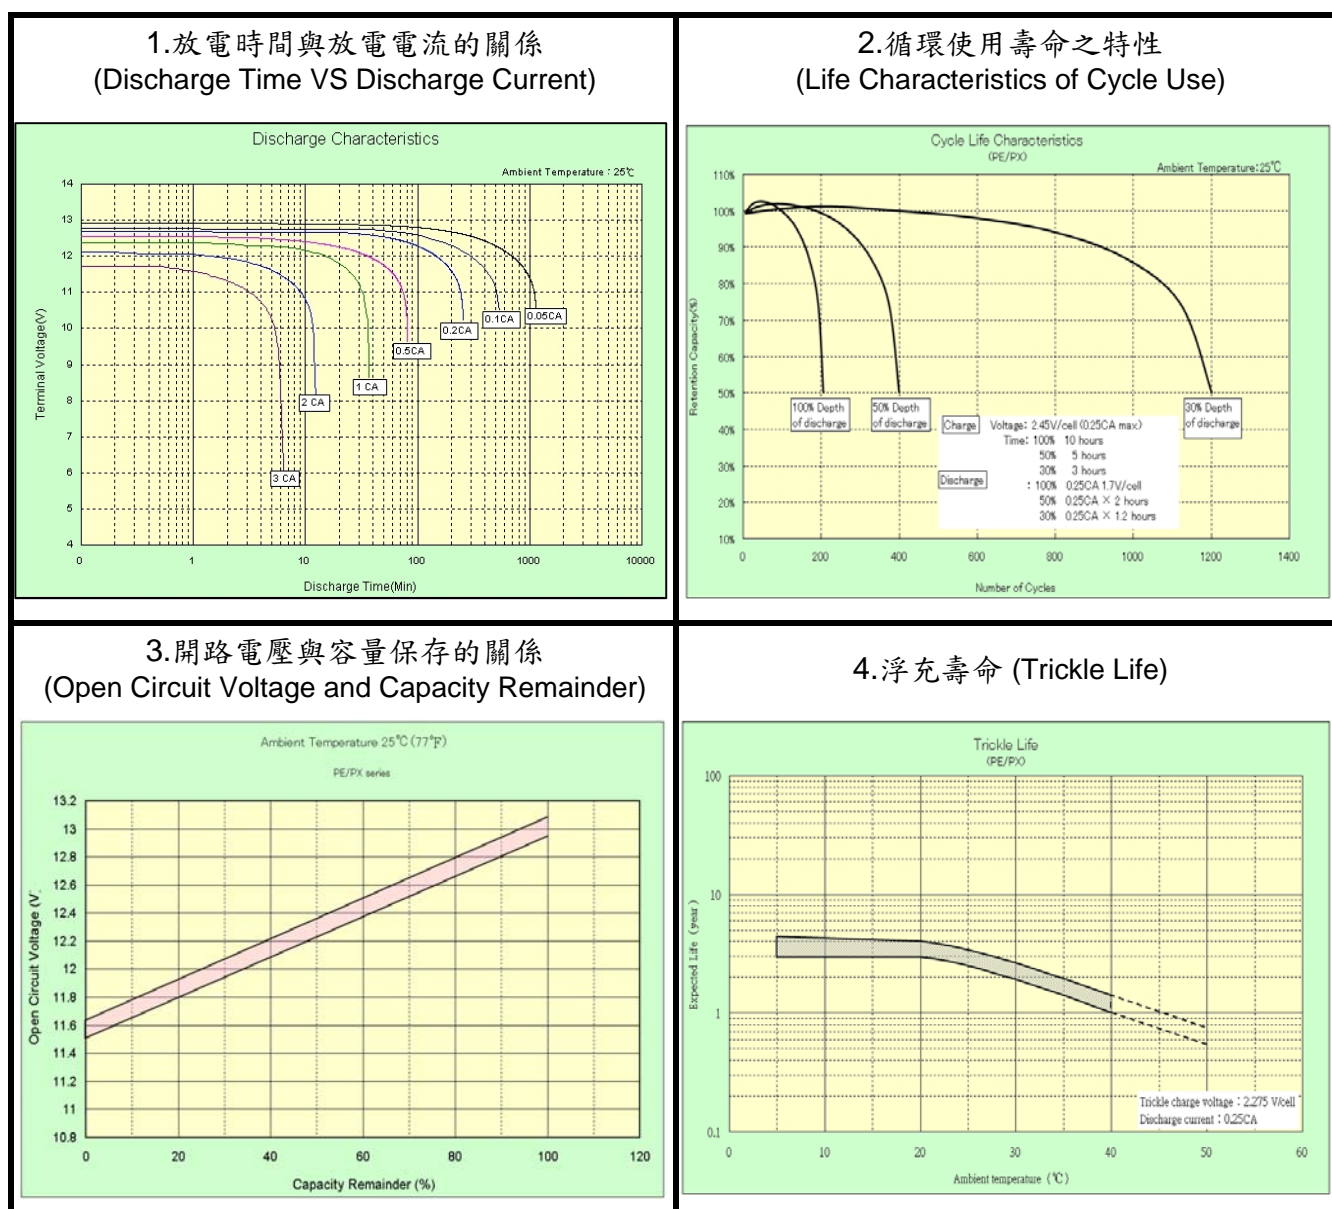

5. 國際認證(International Certification)

- (1).ISO 9001 , QS9000 , TS16949
- (2).UL approval , Code : MH13567

